Panasonic

HIGHWALL & **FLOOR CONSOLE** 2017/2018

> ECONAVI REVERSE CYCLE INVERTER

AERO SERIES

ECONAVI REVERSE CYCLE INVERTER CLASSIC SERIES

Panasonic







KEY FEATURES KEY FEATURES

CLASS LEADING FEATURES

AEROWINGS

SUPERIOR AIRFLOW

Panasonic's new AEROWINGS feature incorporates two independent blades that concentrate airflow to give you comfort in the shortest time possible. This also helps distribute air evenly throughout the room.*

* Aero Series only.



FASTER COOLING

The new Panasonic Thermal Enhancement Technology (P-Tech) enables the compressor to achieve maximum frequency in the shortest time from start up, allowing for 15%* faster cooling.[†]

* Compared to Panasonic 2014 model.

† Aero Series only.



ENERGY SAVING TECHNOLOGY

ECONAVI sensors and INVERTER technology work together to moderate the temperature according to room usage. By adapting to the way you live and optimizing its operation, this unique feature makes the air conditioning more energy efficient and keeps you comfortable throughout the day and night.

CONTROL, COMFORT & REASSURANCE



CLEAN & HEALTHY AIR

nanoe-G utilises nano-technology's fine particles to purify the air in the room. It works effectively on airborne and adhesive micro-organisms such as bacteria, viruses and mould thus ensuring a cleaner living environment.



QUIET OPERATION

Panasonic Air Conditioning Systems are amongst the quietest in the world, so you can enjoy the comfort of running your Air Conditioner at night and still have a relaxing sleep. The outdoor unit is also very quiet which means you don't have to worry about keeping your neighbours up either.



LATEST REFRIGERANT

One of Panasonic's principles has always been to sustain the environment around us. Therefore, we have made it a goal to move toward the more ozone friendly refrigerant R32. It is especially suitable for use in Air Conditioning and results in better energy efficiency.*

* Aero Series only.


KEY FEATURES WI-FI CONTROL

Blue Fin Condenser

An Air Conditioner's performance depends largely on its condenser, which can take a beating from exposure to salty air, wind, dust and other corrosive factors. Panasonic has found a way to expand the life of our condensers, using a layer of our original anti-rust coating. This special coating lets you enjoy more years of reliable comfort plus extra economy over the long run.



longer condenser life for years of reliable comfort. Note: According to Panasonic test results.



y more g run.

EASY-TO-USE REMOTE CONTROLLER

Panasonic's Wireless Remote Controller features a large Liquid Crystal Display (LCD) panel which makes it even more user-friendly. So you can sit back and enjoy easy operation and long-lasting comfort from your Panasonic Air Conditioner.






DUAL TIMER FOR 2 ON AND OFF TIMES PER DAY For convenience, the dual timer repeats everyday until you cancel it. Select 0N or 0FF Timer ON OFF OFF OOF OOFF OOFF

- LCD display for an easy overview of the operation status.
- Come home to fast cooling. Then enjoy continuous comfort with Shower Cooling which avoids direct cooling.
- ECONAVI monitors sunlight intensity, human movement, activity levels and human absence to detect and reduce energy waste.
- Activates the nanoe-g function even when the Air Conditioner is switched off.
- Press up or down to set the temperature.
- Toggles between iAUTO-X, COOL and DRY
- Maintain higher level of Relative Humidity
- Set the airflow.
- Adjusts the fan speed.
- Stronger airflow to cool the room more quickly
 /Quiet function allows you to sleep
 comfortably at pinht
- Set the 24-hour ON & OFF Timer or 24-hour Dual ON & OFF Timer.
- Set the actual time (hour and minute)

Wireless Applicable to ECONAVI Reverse Cycle Inverter

Condenser

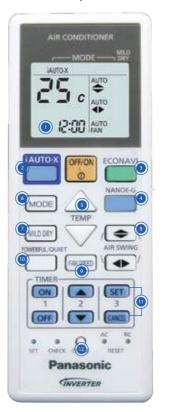

THE SMART WAY TO CONTROL YOUR AIR CONDITIONER



If you've ever found yourself at work, sitting on the train, or at the gym wishing you could turn on your Air Conditioning unit remotely, then IntesisHome's Wi-Fi Controller is a dream come true.*

Now compatible with Panasonic's High Wall Air Conditioner range, IntesisHome's Wi-Fi Controller is a new external wireless device which syncs to your Air Conditioning unit via an Internet connection (Wi-Fi, 3G or 4G).

You can easily operate and control your Air Conditioning unit from any location by using your smartphone, tablet or PC via the IntesisHome App or website. It's also easy to sync the system to your calendar and set-up usage patterns which work best for your schedule.

| Section | Sect



CONTROL AND MONITOR

Turn your Air Conditioning unit On/Off, control operating modes (cooling, heating, auto), fan speed and louvre position.

RECEIVE ALERTS

Notifications are sent to your smart device on maintenance, firmware updates and the status of your Air Conditioning unit.

USER-FRIENDLY

The system is multilanguage, and it's equipped with a stylish and intuitive interface.

PROGRAMMABLE YEARLY CALENDAR

Easily set-up usage patterns in a calendar schedule.

^{*}Not available on floor console

RELIABLE COMFORT COMES FROM RELIABLE TECHNOLOGY

DISCREET COMFORT

A Panasonic Air Conditioner should be the hard-working hero you never notice. From noise measurements, to environmental performance and even operating ease, we repeatedly test our models to make sure they keep your home comfortable without ever intruding on your life.



TESTED DURABILITY

We simulate continuous operation under the harshest of conditions, subject the outdoor units to wind and rain tests and then examine every mechanism to ensure we are delivering a rugged product you can depend on for many years.



SHOCK RESISTANCE


We love our Air Conditioners but that doesn't mean we go easy on them. We simulate impacts, vibrations, drops and stacking issues the units might face in transportation and storage, so we know they will be ready for action when they reach your home.





KIWI TEMPERATURES

Our Air Conditioning systems boast an outstanding operating temperature range. Cooling operation is possible even when it is a scorching +46°C outside, which is perfect for our hot summer days. The heating operation is designed to operate even when it's a freezing -15°C outside, so even the coldest parts of New Zealand are covered.



BUILT TOUGH

Panasonic outdoor units are built to last in the harsh New Zealand environment. To ensure you will enjoy many years of reliable comfort from your Air Conditioner the internal components of the outdoor unit are coated with a special blue coating that protects the unit from the damaging effects of salty air, dust, wind and rain.



COUNT ON PANASONIC

Panasonic Air Conditioners are manufactured to the highest quality standards to ensure years of reliable comfort. We even back our reliability by offering a full 5 year parts and labour warranty.

ECONAVI + INVERTER
AIR PURIFICATION SYSTEM

INTELLIGENT ECO SENSORS



Enjoy Ultimate Comfort With Energy Savings

ECONAVI has two sensors – Human Activity Sensor and Sunlight Sensor. Together, they monitor human location, movement, absence, and sunlight intensity to use energy more efficiently.

ECONAVI SAVES YOU ENERGY BECAUSE IT SENSES:





Where you are.



When you leave the room.



When you are less active.



Whether it's a sunny day




Adapts rhythmic temperature control after detecting low activity level.

*Note: Selected Models Only.




Precise Temperature Control

INVERTER prevents wasteful energy consumption by varying the compressor rotation speed to maintain the set temperature.



A conventional non-INVERTER
Air Conditioner can only operate at a constant speed which is too powerful to maintain the set temperature. Thus, it switches the compressor on and off repeatedly. This results in wider temperature fluctuations leading to wasteful consumption of energy.



The Panasonic INVERTER
Air Conditioner varies the rotation
speed of the compressor, providing a
precise method of maintaining the set
temperature. Thus, Panasonic
INVERTER Air Conditioners give you
exceptional energy saving performance
while ensuring you stay comfortable at
all times.





Breathe Clean & Healthy

For overall wellbeing, Panasonic Air Conditioners feature an advanced air purification system called nanoe-G, which releases active ions that attach to particles as small as PM2.5.

How nanoe-G works:





Removal of 99% of particle pollution (PM2.5)*1 and airborne particles*2 such as bacteria, viruses and mould.

DEACTIVATES ADHESIVE PARTICLES & DEODORISES ADHESIVE ODOURS (Up to 99%'3)


Deactivates 99%*3 adhesive micro-organisms and deodorises adhesive odours.



3 adhesive Deactivates 99%*4 of bacteria and viruses trapped in the sive odours. filter.

NOTE: "3 trillion is the simulated number of nanoe-G fine particles under the mentioned conditions. Actual measured nanoe-G fine particles at the centre of the room [13m²]: 100k/cc calculated number of nanoe-G fine particles in the entire room assuming they are evenly distributed. "FM2.5 Removal was certified by FCG Research Institute, Inc. Test Report no: 25034. PM2.5: Cigarette Smoke (as PM2.5). Effectiveness is measured on 0.3µm-2.5µm. (Specific size only). This removal effect is not proven for all the airborne toxic substances. "Airborne Removal was certified by Kitasato Research Center for Environmental Science KRCES-Bio. Test Report no., 23_0182 Bacteria, Staphylococcus aureus (NBRC 12732) KRCES-Env. Test Report no: 22_0008. Virus: Escherichia coli phage [øX-174 ATCC 13706-B1] Influenza [H1IN1] 2009 Virus. KRCES-Env. Test Report no: 23_0140 Mould: Penicillium pinophilum (NBRC 6345). "3Adhesive Deactivation was certified by Japan Food Research Laboratories. Test Report number: 11047937001-02 Bacteria: Staphylococcus aureus (NBRC 12732) Test Report number: 1107349901-02 Virus: Bacteriophage (Phi X 174 NBRC 103405) Test Report number: 11047937001-02 Mould: C/adosporium cladosporioides (N BRC 6348) Adhesive odour deodorisation was certified by OMI ODOR-AIR SERVICE Co. Ltd. Test Report No. 13-1204. "In-Filter Deactivation was certified by Japan Food Research Laboratories Test Report number: 12037932001 Virus: Escherichia coli phage [øX-174 ATCC 13706-B1] In-Filter Deactivation was certified by Kitasato Research Center for Environmental Science. Test Report number: KRCES-Virus Test Report No. 24 0013 Virus: Influenza [H1N1] 2009 Virus.

[&]quot;%"%"4"4 All results are based on specific testing conditions. All tests are not demonstrated under actual usage situation

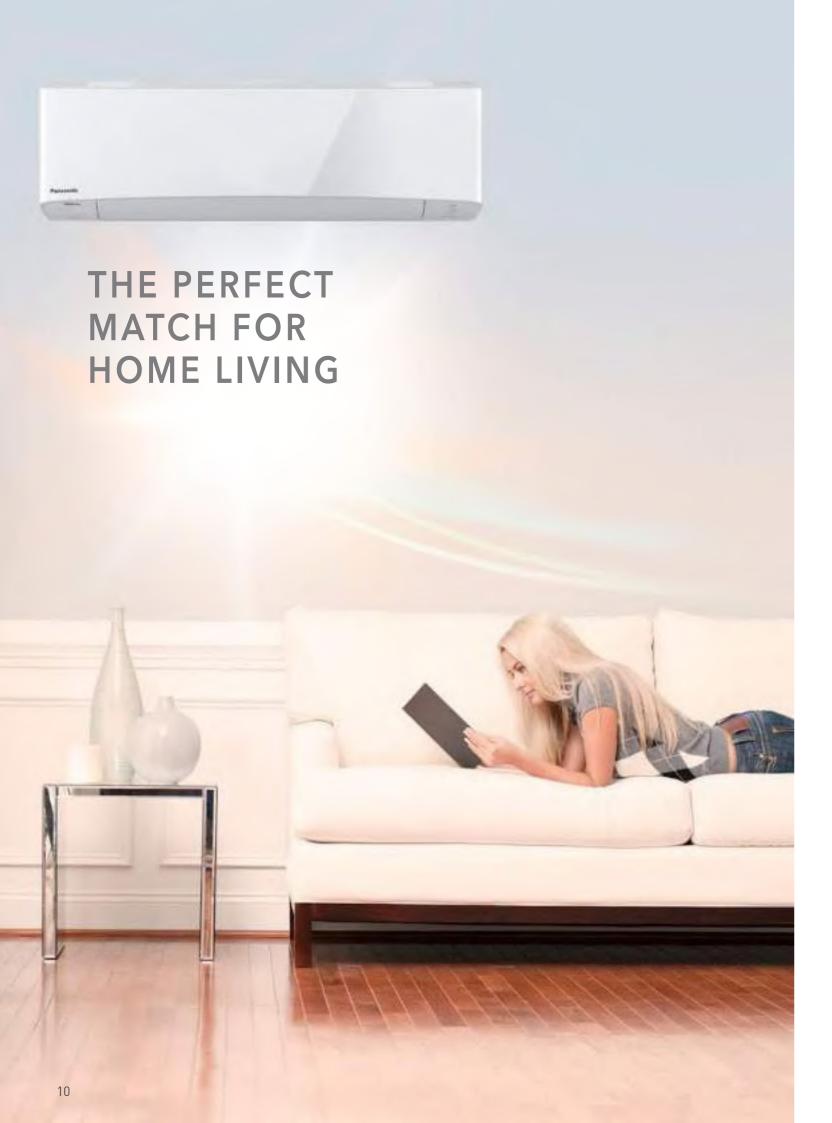

FEATURES

Sensors detect opportunities to reduce waste for more energy savings.



MILD OASK

TEMPERATURE WAVE

Rhythmic temperature-controlled pattern to save energy without sacrificing comfort.



INVERTER CONTROL



iAUT0-X

ECONAVI

Come home to ultra-fast cooling, and then enjoy continuous comfort Shower Cooling that evenly distributes cool air.



Fine control helps prevent a rapid decrease in room humidity while maintaning the set temperature.

POWERFUL MODE

Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive.



QUIET MODE

FAN MODE

Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.

Allows you to run the fan without any cooling or heating, thus giving just ventilation.

Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the temperature.

SOFT DRY OPERATION MODE



FAN MODE

PERSONAL AIRFLOW CREATION

Vertical and horizontal airflow patterns can be combined as desired to achieve optimum comfort, with operation possible by remote, even from a distance.









On the start of the heating cycle and after the defrost cycle, the indoor fan will start up once the indoor heat exchanger is warm.



*--0---

CLEAN & HEALTHY AIR

nanoe-G

nanoe-G works effectively on airborne particles including PM2.5, adhesive and in-filter micro-organisms such as bacteria, viruses and mould ensuring a cleaner living environment.



ODOUR-REMOVING FUNCTION

With this function, there's no unpleasant odor when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed.

The unit must be in cool or dry mode and the fan speed must be set to automatic



REMOVABLE, WASHABLE PANEL



CONVENIENCE

24-HOUR DUAL ON & OFF REAL SETTING TIMER

This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.

DEMAND RESPONSE ENABLING DEVICE (DRED)



DUAL 24

3RD PARTY CONNECTIVITY

Allows limited control from an external source when wired to do so.



WIRED REMOTE CONTROL (OPTIONAL)



LCD WIRELESS REMOTE CONTROL



RELIABILITY

BLUE FIN CONDENSER

RANDOM AUTO RESTART

When multiple units are connected and there is a power outage, they will turn on at different times in order to not spike the power supply.



LONG PIPING

Long piping offers more flexible installation

TOP-PANEL MAINTENANCE ACCESS





Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker



SPECIFICATIONS SPECIFICATIONS

AERO SERIES SPECIFICATIONS



CS-Z20TKR | CS-Z25TKR | CS-Z35TKR | CS-Z42TKR

CS-Z50TKR | CS-Z60TKR | CS-Z71TKR | CS-Z80TKR



Wireless

Wireless

CZ-RD514C Wired Remoted Controller (Optional)



CZ-RD514C Wired Remoted Controller (Optional)



SPECIFICATIONS

М	ODEL	(240V / 1 P	hase / 50Hz)	CS-Z20TKR	CS-Z25TKR	CS-Z35TKR	CS-Z42TKR	CS-Z50TKR	CS-Z60TKR	CS-Z71TKR	CS-Z80TKR
				[CU-Z20TKR]	[CU-Z25TKR]	[CU-Z35TKR]	[CU-Z42TKR]	[CU-Z50TKR]	[CU-Z60TKR]	[CU-Z71TKR]	[CU-Z80TKR]
	oling / Heating	(min-max)	kW	2.05 (0.85~2.40) 2.70 (0.70~4.00)	2.50 (0.90~3.00) 3.20 (0.80~5.00)	3.50 (0.90~4.00) 4.30 (0.80~5.80)	4,20 (0.90~5.00) 5.10 (0.90~7.10)	5.00 (0.90~6.00) 6.00 (0.90~8.00)	6.00 (1.70~7.10) 7.20 (1.70~8.50)	7.10 (1.70~8.10) 8.00 (1.70~9.90)	8.00 (2.30~9.00) 9.00 (2.20~11.00)
Ca	pacity	(min-max)	Btu/h	6,990 (2,900~8,180) 9,210 (2,390~13,600)	8,530 (3,070~10,200) 10,900 (2,730~17,100)	11,900 (3,070~13,600) 14,700 (2,730~19,800)	14,300 (3,070~17,100) 17,400 (3,070~24,200)	17,100 (3,070~20,500) 20,500 (3,070~27,300)	20,500 (5,800~24,200) 24,600 (5,800~29,000)	24,200 (5,800~27,600) 27,300 (5.800~33,800)	27,300 (7,840~30,700) 30,700 (7,500~37,500)
Air Flow		Indoor L/s		173/182	200/205	207/210	222 <mark>/222</mark>	335/325	340/340	355/355	370/370
De	humid		L/h	1.3	1.5	2.0	2.4	2.8	3.3	4.1	4.7
Ele	ectrical Data	Running Current	А	1.95/2.56	2.30/2.90	3.65/4.40	4.70/5.9	5.10/5.80	7.00/7.80	8.60/9.20	10.90/11.30
Lite	ectificat Data	Power Input	kW	0.41 (0.20~0.57) 0.55 (0.16~1.08)	0.50 (0.21~0.75) 0.62 (0.175~1.30)	0.80 (0.21~1.06) 0.94 (0.175~1.56)	1.07 (0.215~1.60) 1.34 (0.245~2.25)	1.13 (0.23~2.05) 1.31 (0.26~2.65)	1.58 (0.44~2.20) 1.78 (0.40~2.50)	1.97 (0.43~2.48) 2.11 (0.38~3.00)	2.32 (0.46~2.82) 2.41 (0.50~3.30)
	ER / EER OP / COP		W/W W/W	5.00/5.00 4.91/4.91	4.89/5.00 5.07/5.16	4.31/4.38 4.52/4.57	3.88/3.93 3.77/3.81	4.38/4.42 4.54/4.58	3.77/3.80 4.02/4.04	3.58/3.60 3.77/3.79	3.43/3.45 3.71/3.73
Sta	ar Rating			5.0 5.0	5.0 4.5	4.0 3.0	3.0 4.5	4.0 3.5	3.0 3.0	2.5 2.5	2.0 2.5
	Sound Pressu	Indoor (F	Hi/L/Q-Lo)	18/24/19 39/25/21	43/25/19 42/27/21	44/26/19 46/29/21	47/30/23 46/31/27	47/34/31 45/33/29	47/36/33 47/35/32	49/37/34 49/37/34	51/38/35 50/38/35
Noise	Level*1 dB(A)	Outdoo	or (Hi / Q-Lo)	45/- 46/-	47/- 47/-	49/- 50/-	47/42 47/42	48/43 48/43	53/48 53/48	54/49 54/49	55/50 55/50
	Sound Power	Level dB Outdoo	or (Hi / Q-Lo)	60/- 61/-	62/- <mark>62/-</mark>	64/- 65/-	62/57 62/57	62/57 62/57	67/62 67/62	68/63 68/63	69/64 69/64
Ne	t Weight	Indoor (Outdoor)	kg	10(32)	10(32)	10(32)	10(43)	13[44]	13(50)	13(50)	13(60)
Dir	mensions	Indoor (H x W x D) Outdoor (H x W x D)	mm mm	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 542 x 780 x 289	295 x 919 x 194 695 x 875 x 320	302 x 1120 x 236 695 x 875 x 320	302 x 1120x 236 695 x 875 x320	302 x 1120 x 236 695 x 875 x320	302 x 1120 x 236 795 x 875 x 320
	frigerator Pipe	Liquid Side	mm/(inch)	6.35 [1/4]	6.35 [1/4]	6.35 (1/4)	6.35 (1/4)	6.35 [1/4]	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
Dia	ameter	Gas Side	mm/(inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	12.70 (1/2)	12.70 (1/2)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)
Pip	e Extension Len	gth M	fin ~ Max (m)	3~20	3~20	3~20	3~30	3~30	3~30	3~30	3~30
Pip	oe Length For Ado	ditional Gas	m	7.5	7.5	7.5	7.5	10	10	10	10
Ad	ditional Gas Amo	unt	g/m	10	10	10	15	15	15	25	25
Power Supply				Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
_Op	erating Range (O	utdoor) Cooling Heating	Degree °C	+5~46 -15~24	+5~46 -15~24	+5~46 -15~24	+5~46 -15~24	+5~46 -15~24	+5~46 -15~24	+5~46 -15~24	+5~46 -15~24
Ref	Refrigerant Type		R32	R32	R32	R32	R32	R32	R32	R32	

^{*1} Sound pressure level specification is measured according to JIS C9612.

SPECIFICATIONS & FEATURES

Products in this brochure contain R32 refrigerant. Please refer to Panasonic's installation instructions and service manuals before installation and servicing this product.

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required.

Future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

ALL CAPACITY AND ENERGY EFFICIENCY RATINGS

AKE BASEL	ARE BASED UN AS/NZS38Z3.Z.						
COOLING	Indoor temperature Outdoor temperature	27°C DB/19°C WB 35°C DB					
HEATING	Indoor temperature Outdoor temperature	20°C DB 7°C DB / 6°C WB					
	Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions.						

OUTDOOR







CU-Z20TKR

CU-Z25TKR

CU-Z35TKR









CLASSIC SERIES SPECIFICATIONS



CS-E7PKR | CS-E9PKR | CS-E12PKR | CS-E15PKR



Wireless

900



Controller (Optional)



CS-E18PKR | CS-E21PKR | CS-E24PKR | CS-E28PKR

Wireless

CZ-RD514C Wired Remoted Controller (Optional)

WiFi (Optional)

CDE	CILIC	ATIO	NIC
SPE	CIFIC	AIIU	N >

SPECIFI	CATIONS								
MODEL	[240]	CS-E7PKR (CU-E7PKR)	CS-E9PKR (CU-E9PKR)	CS-E12PKR (CU-E12PKR)	CS-E15PKR (CU-E15PKR)	CS-E18PKR (CU-E18PKR)	CS-E21PKR (CU-E21PKR)	CS-E24PKR (CU-E24PKR)	CS-E28PKR (CU-E28PKR)
	kl	V 2.05 (0.85~2.40) 2.80 (0.70~4.10)	2.60 (0.90~3.00) 3.60 (0.80~5.00)	3.50 (0.90~4.00) 4.90 (0.80~6.70)	4.40 (0.90~5.00) 5.50 (0.90~7.10)	5.00 (0.90~6.00) 6.35 (0.90~8.00)	6.30 (1.70~7.10) 7.20 (1.70~8.50)	7.00 (1.70~8.10) 8.00 (1.70~9.90)	8.00 (2.30~8.60) 9.00 (2.20~11.00)
Cooling/Heating*2(Capacity Btu	h 6,990 (2,900~8,180) 9,550 (2,390~14,000)	8,870 (3,070~10,200) 12,300 (2,730~17,100)	11,900 (3,070~13,600) 16,700 (2,730~22,800)	15,000 (3,070~17,100) 18,800 (3,070~24,200)	17,100 (3,070~20,500) 21,700 (3,070~27,300)	21,500 (5,800~24,200) 24,600 (5,800~29,000)	23,900 (5,800~27,600) 27,300 (5,800~33,800)	27,300 (7,840~29,300) 30,700 (7,500~37,500)
Air Flow	L	rs 175 188	200 215	213 222	247 243	283 295	288 277	340 347	359 357
Dehumid	L	h 1.3	1.6	2.0	2.4	2.8	3.5	4.0	4.7
Running Current		A 2.2 2.8	2.5 3.4	3.7 5.5	5.4 6.5	5.8 7.5	8.4 8.5	9.5 9.7	10.9 11.9
Power Input	K	N 0.46 (0.20-0.59) 0.62 (0.16-1.05)	0.55 (0.21~0.78) 0.75 (0.18~1.36)	0.83 (0.21~1.10) 1.22 (0.18~1.89)	1.20 (0.22~1.60) 1.47 (0.25~2.25)	1.30 (0.23~2.05) 1.69 (0.26~2.65)	1.80 (0.44~2.20) 1.98 (0.40~2.50)	2.11 (0.43~2.48) 2.21 (0.38~3.00)	2.39 (0.46~2.70) 2.63 (0.50~3.30)
EER/COP	w/	w 4.46 4.52	4.73 4.80	4.22 4.02	3.67 3.74	3.85 3.76	3.50 3.64	3.32 3.62	3.35 3.42
Star Rating		3.5 4.0	4.5 4.5	3.0 3.0	2.5 2.5	2.5 2.5	2.0 2.0	2.0 2.5	2.0 2.0
Sound Pressure	Inside (Hi/Lo/S-L	37/24/21 38/25/21	42/25/21 41/27/21	43/26/21 46/29/26	47/30/23 45/31/27	47/34/31 44/33/29	47/36/33 47/35/32	49/37/34 49/37/34	51/38/35 50/38/35
Level*1dB (A)	Outside (Hi/S-L	45/ 46/	47/ 47/	49/ 50/	47/42 47/42	48/43 48/43	53/48 53/48	54/49 54/49	55/50 55/50
Sound Power Level dB (A)	Outside (Hi/S-L	60/ 61/	62/ 62/	64/ 65/	62/57 62/57	62/57 62/57	67/62 67/62	68/63 68/63	73/68 73/68
Net Weight	Indoor (Outdoor) k		9 (33)	9 (33)	9 (51)	12 (52)	12 (59)	12 (60)	12 (74)
Dimensions	Indoor (H x W x D) Outdoor (H x W x D)	n 290 x 870 x 214 (619 x 824 x 299)	290 x 870 x 214 (619 x 824 x 299)	290 x 870 x 214 (619 x 824 x 299)	290 x 870 x 214 (795 x 875 x 320)	290 x 1070 x 240 (795 x 875 x 320)	290 x 1070 x 240 (795 x 875 x 320)	290 x 1070 x 240 (795 x 875 x 320)	290 x 1070 x 240 (1170 x 900 x 320)
Refrigerant	Liquid Side mm/(incl	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
Pipe Diameter	Gas Side mm/(incl	9.52 (3/8)	9.52 (3/8)	12.70 (1/2)	12.70 (1/2)	12.70 (1/2)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)
Pipe Extension Len	gth Min~Max (n	3~15	3~15	3~15	3~20	3~20	3~20	3~30	3~30
Pipe Length for Add		n 7.5	7.5	7.5	7.5	10	10	10	10
Additional Gas Amo	ount g/i		20	20	20	20	20	30	30
Power Supply		Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Oneration Ranne	Cooling Degree (°C	5-46	5~46	5~46	5~46	5~46	5~46	5~46	5~46

^{*1} Sound pressure level specification is measured according to JIS C9612.
*2 Maximum heating capacity shown are the values based on powerful operation.

realing Conditions						
	Cooling	Heating				
Inside air temperature	27 °C DB/19 °C WB	20°C DB				
Outside air temperature	35 °C DB	7°C DB/6°C WB				

OUTDOOR







CU-E15PKR CU-E18PKR CU-E21PKR CU-E24PKR



CU-E28PKR



Power plugs are not supplied with the unit.

[.] Electrical work must be installed by a licensed electrician. Be sure to use the correct rating of the power plug and mains circuit for the model to be installed.

Please read the Installation Instructions carefully before installing the unit, and read the Operating Instructions before using

FEATURES

FLOOR CONSOLE FEATURES



COMFORTABLE UP-DOWN BI-DIRECTIONAL AIRFLOW WARMS THE ENTIRE ROOM DOWN TO YOUR TOES

■ Upper & Lower Vane Blow

Optimum air flow from the top and bottom of the unit assures that even your feet are kept comfortably warm. (Only during heating)



■ Compact Design

The design features a flat, elegant front panel that provides a neat appearance and the unit can be recessed into a wall up to 95 mm.



■ Compatible with Multi System

You can use up to 4 indoor units with 1 outdoor unit, minimising the space required for outdoor units

- *Compatible outdoor units - CU-4E27PBE
- CU-4E27PBE



■ Super Quiet

The indoor and outdoor units deliver quiet operation and pressing the Quiet mode button lowers operation noise even further to just 23dB for indoor unit with low fan speed.



*2CS-E9GFEW: In the Quiet mode during cooling/heating operation with low fan speed CS-E12GFEW: In the Quiet mode during heating operation with low fan speed

FLOOR CONSOLE SPECIFICATIONS



CS-E9GFEW

CS-E9GFEW

CS-E9GFEW

CS-E12GFEW

CS-E12GFEW

CS-E18GFEW

CS-E18GFEW

CS-E18GFEW

CS-E18GFEW

CS-E18GFEW

CS-E18GFEW

CS-E9GFEW | CS-E12GFEW | CS-E18GFEW

Cooling (): Outdoor Unit EER : Cooling Efficiency Heating COP: Heating Efficiency

SPECIFICATIONS

MODEL		(240V)	CS-E9GFEW (CU-E9GFE-1)	CS-E12GFEW (CU-E12GFR)	CS-E18GFEW (CU-E18GFR)
Carling/Hanking Co	Cooling/Heating Capacity Btu/h		2.50 (0.80~3.00) 3.60 (0.80~5.00)	3.40 (0.80~3.80) 4.40 (0.80~5.40)	5.00 (0.90-5.60) 5.60 (0.90-6.50)
Cooling/Healing Ca			8,500 (2,700~10,200) 12,300 (2,700~17,100)	11,600 (2,730~13,000) 15,000 (2,730~18,400)	17,100 (3,070~19,100) 19,100 (3,070~22,200)
Air Flow		L/s	155 160	158 167	183 217
Dehumid		L/h	1.4	2.0	2.8
Running Current		А	2.65 3.90	3.8 4.9	6.5 6.6
Power Input		kW	0.57 (0.18-0.78) 0.87 (0.17-1.36)	0.86 (0.19~1.14) 1.09 (0.18~1.42)	1.55 (0.26~1.91) 1.50 (0.26~1.73)
EER/COP		w/w	4.39 4.16	3.95 4.04	3.23 3.73
Star Rating			3.5 3.0	2.5 2.5	1.5 2.0
Sound Pressure		Inside (Hi/Lo/S-Lo)	38/27/23 38/27/23	39/28/24 39/27/23	44/36/32 46/36/32
Level*1 dB (A)		Outside (Hi/S-Lo)	46/ 47/	48/ 50/	47/ 48/
Sound Power Level dB (A)		Outside (Hi/S-Lo)	59/ 60/	63/ 65/	61/ 62/
Net Weight		kg	14 (34)	14 (35)	14 (49)
Dimensions	Height x	Width x Depth mm	600 x 700 x 210 (540 x 780 x 289)	600 x 700 x 210 (540 x 780 x 289)	600 x 700 x 210 (750 x 875 x 345)
Refrigerant	Liquid Si	de mm/(inch)	6.35 [1/4]	6.35 [1/4]	6.35 [1/4]
Pipe Diameter	Gas Side	mm/(inch)	9.52 (3/8)	9.52 (3/8)	12.70 [1/2]
Pipe Extension Len	igth	Min~Max (m)	3~15	3~15	3~20
Pipe Length for Add	ditional Gas	m m	7.5	7.5	10
Additional Gas Amo	ount	g/m	20	20	20
Power Supply			Outdoor	Outdoor	Outdoor
Operating Range	Cooling	Degree (°C)	16~43	16~43	16~43
(Outdoor)	Heating Degree (°C)		-15~24	-15~24	-15~24

 $^{^{\}ast 1}$ Sound Pressure Level is measured according to JIS C 9612.


OUTDOOR

CU-E9GFE-1 CU-E12GFR



CU-E18GFR









Clever, made easy | Panasonic

panasonic.co.nz